


# Monocrystalline Silicon Solar Modules

## 200M-72 Series

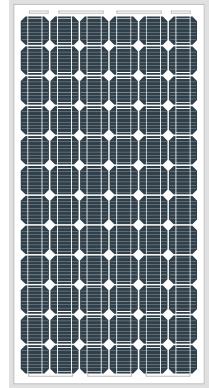

### Specification:

- Solar cell: High efficiency crystalline solar cell. Even if under the weak light, the solar module can produce maximum power output
- Tempered glass: Anti-reflecting coating and high transmission rate glass increase the power output and mechanical strength of solar module.
- EVA and TPT: Using high quality EVA and TPT to prevent destroying and water.
- All frame: Without screw, corner connection. 8 holes on the frame can be installed easily.
- Junction box: Multi function junction box with water proof.
- Long lifetime: 25 years; Less power decrease.
- Good performance of preventing from atrocious weather such as wind and hails.
- Resisting moisture and etching effectively, not effect by geology.
- The certificate issued by international authority: ISO Quality Management system, CE, TUV, VDE, UL (IEC 61215 and IEC61730)

### Mechanical Characteristics

Cells Size(mm)	125×125
Modules Size(mm)	1580×808×40
No.of cells	72(6×12)
Weight(KG)	15.2
No.of Mounting Holes	8
No.of Waterspout	16


### Temperature Coefficient

Noct	45°C±2°C
Temperature coefficient of Isc	0.06%/°C
Temperature coefficient of Voc	-0.34%/°C
Temperature coefficient of Pmax	-0.45%/°C
Power Tolerance	0/ + 3%
Working temperature	-40°C to 85°C


### Package Information

Type	Frame	Pcs/Carton	Cartons/Container	Pcs/Pallet	Pallets/Container	Pcs/Container
40GP 1580×808 125M 72 cells	40	2	42	26	28	812

### Module Diagram:

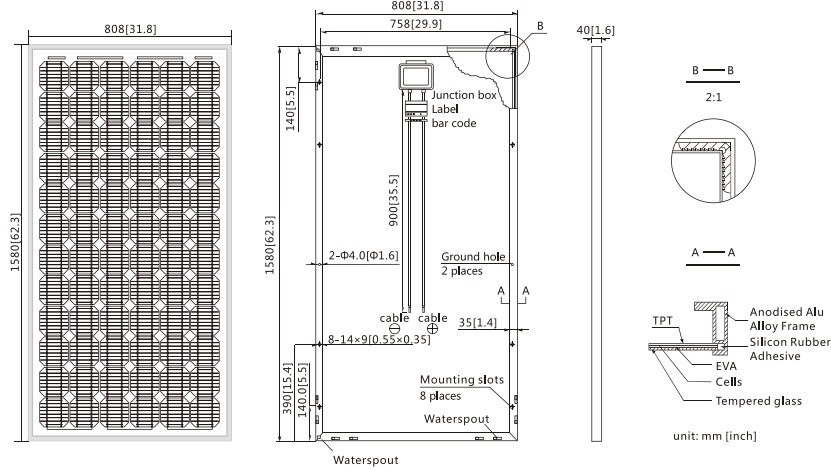

### Electrical Curves:

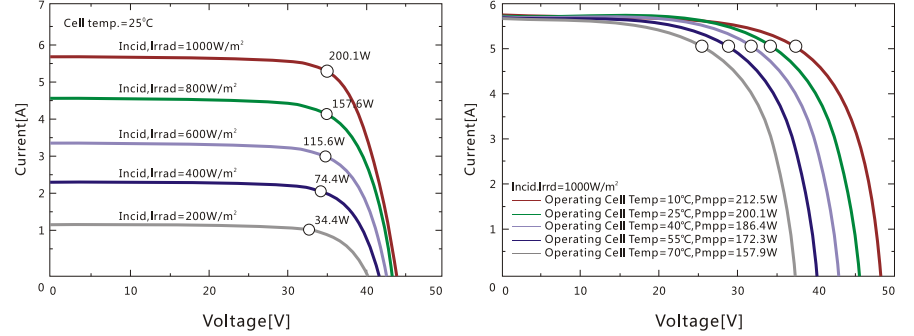

### Electrical Characteristics: Power range:160w-220w

Module	180M-72	185M-72	190M-72	195M-72	200M-72	205M-72	210M-72	215M-72
Pm	180	185	190.9	195	200	205	210	215
Vmp	36.08	36.21	36.83	37.43	37.89	38.19	38.47	38.68
Imp	4.99	5.11	5.16	5.21	5.28	5.37	5.46	5.56
Voc	44.64	44.89	45.02	45.26	45.48	45.65	45.80	45.90
Isc	5.47	5.54	5.56	5.62	5.66	5.73	5.81	5.91
Maxium system voltage	1000VDC	1000VDC	1000VDC	1000VDC	1000VDC	1000VDC	1000VDC	1000VDC

STC:Irradiance 1000W/m<sup>2</sup>, Temperature 25°C,AM=1.5